

Technical information

# Hybrid series 2 composite thermally broken sash window system



SENIOR **HYBRID** SYSTEMS™

## Scope

Hybrid series 2 thermally broken sash windows feature slimmer sightlines for increased aesthetics and have been designed to meet current and future building regulations, with impressive U values and thermal performances. Hybrid is a high insulation timber/aluminium composite system manufactured in the UK, complete with a selection of window, curtain walling and door options. It combines the long life and low maintenance of aluminium externally with the high insulation, environmentally focused benefits of responsibly sourced engineered timber internally. Hybrid series 2 thermally broken sash windows are capable of accepting glazing up to 32mm thick depending on weight.

## Materials

- All aluminium sections are extruded using Aluminium Alloy 6060 or
- Polyamide thermal barriers are manufactured in accordance with PA66 GF25.
- Gaskets are manufactured in accordance with BS3734.
- Timber profiles are certified by MPA Stuttgart with quality class BS1100, laminated according to DIN1502 using weather proof and heat proof melamine glue; humidity 12% +/-2%; only lamellas without fault are laminated. Finger joints in outer layer min 500mm centres. PEFC /04-32-0042 certified. Timber profiles are matt lacquered 150-300 microns wet film thickness.

## Finishes

Hybrid casement window sections are available typically in 4 finishes.

- Polyester Powder Coating to BS EN 12206: 2004 Part 1 - painted in house. Surface finish at 40 microns standard, or enhanced to 60 microns for marine environments, in accordance with ISO9001, ISO14001 and ISO18001.
- Anodised and Anolok finishes are to BS3897: 1991 to a minimum of 25 microns (AA25), supplied in either or polished finish in a limited range of colours.
- Mill finish.
- Clear lacquered or painted timber

## Construction

Hybrid is constructed using mitred and mechanically crimped corners, with support chevrons and cleats and patented dovetail keys. Integral transoms and mullions are scribed around the outer frames and fixed with either screw ports or shear blocks. A proprietary sealant is used on all metal joints in line with good practice. Timber mainframe sections are mitre jointed using a unique closed joint system. All cut faces are treated with the proprietary sealant, and all permanently exposed cut timber faces are sealed in accordance with the manufacturers recommendations. Transoms and mullions are installed by scribing the end then fixing to the outer frame. Opening window frames are designed to be inserted directly into the outer frames using friction stays.

## Weather Rating BS6375 Part 1: 2004

Air Permeability	600
Water Tightness	600
Wind Resistance	2400

## Typical\* sizes

	Width (mm)		Height (mm)
Top Hung Open Out	1500	x	1500
Side Hung Open Out	900	x	1500
Fixed Light	1500	x	1800

\*For guidance only - when exceeded please consult our technical department.

## Glazing


Thickness	28mm	to	32mm
-----------	------	----	------

## Average U values

	1200 x 1200	1500 x 1500
Vent	1.44W/m <sup>2</sup> K	1.38W/m <sup>2</sup> K
Fixed	1.44W/m <sup>2</sup> K	1.38W/m <sup>2</sup> K

## Security

Tested to BS7950, security hardware required

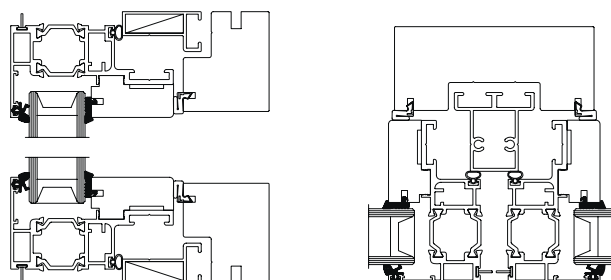

## Environmental

Senior Architectural Systems is fully compliant with BS EN ISO19001, BS EN ISO 14001 and OHSAS 18001 Standards.

Hybrid when used on projects involved in a BREEAM assessment, or within the Code for a Sustainable Built Environment and the Code for Sustainable Homes (which therefore involves the Green Guide to specification) can offer significant benefits. For project specific assistance, please contact our specification team.

**Specification. Please contact our national team of architectural advisors for advice on product suitability, calculations and NBS or bespoke specifications.**