


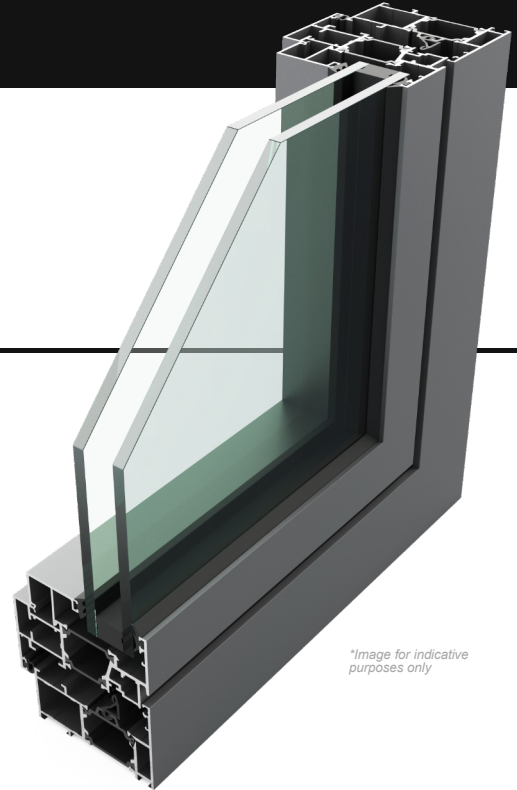

SPW600e Inward Opening Tilt & Turn Window System

Technical Datasheet



**Image for indicative purposes only*

Scope

The SPW600e Inward Opening Tilt & Turn window has been designed to meet current building regulations. This is a three chamber 75mm polyamide window system with the option for easy thermal inserts to improve thermal performance. It is capable of accepting glazing up to 56mm thick.

Materials

- Extruded aluminium is generally Aluminium Alloy 6060.T6/T66, 6063.T6/T66, 6082.T6 to BS EN 755-9 and EN 12020-2.
- Polyamide thermal barriers are manufactured in accordance with PA66 GF25.
- The Gasketry is generally manufactured in accordance with BS ISO 3302-1.
- The fixings are generally A2 Stainless Steel screws.

Finishes

SPW600e Inward Opening Tilt & Turn window sections are available typically in three finishes.

- Polyester Powder Coating to BS EN 12206-1 Part 1 painted in house. Surface finished to a minimum of 40 microns standard, or enhanced to suit project requirements, in accordance with ISO 9001, ISO 14001 and ISO 45001.
- Anodised finishes are to BS3897 to a minimum of 25 microns (AA25), supplied in either satin or polished finish in a limited range of colours.
- Mill Finish.

Construction

SPW600e is constructed using mitred corners, joined with crimped or mechanical cleats; alignment chevrons assist in clean, accurate mitres. Integral transoms and mullions are scribed around the outer frames and fixed with either screw ports or shear blocks. A proprietary sealant is used on all metal joints in line with good practice. Opening window frames are designed to be inserted into the outer frames using specialist gearing.


Environmental

Senior Architectural Systems is fully compliant with BS EN ISO 9001, BS EN ISO 14001, ISO 45001 and BES6001 standards. When used on projects involved in a BREEAM assessment, or within the Code for a Sustainable Built Environment, (which therefore involves the Green Guide specification) can offer significant benefits. For project specific assistance, please contact our specification team.

Typical Sizes	Width (mm)	Height (mm)
Inward Opening Tilt & Turn	1500	2400
*Average U-values		
Residential CEN standard (Double Glazed)	1.5 W/m ² K	
Residential CEN standard (Triple Glazed)	1.1 W/m ² K	
Commercial CEN standard (Double Glazed)	1.5 W/m ² K	
Commercial CEN standard (Triple Glazed)	1.1 W/m ² K	
Glazing		
Thickness	28mm - 56mm	
Testing		
Security	PAS24 & SBD	
BS6375 - 1	Air Permeability 600Pa	
	Water Tightness 600Pa	
	Wind Resistance 2400Pa	
BS6375 - 2	✓	
Acoustics		
Acoustics performance (IGU Dependent)	47dB reduction is achievable	

**All calculations are based on CEN sized windows at 1230mm x 1460mm.*

Test certifications available upon request.

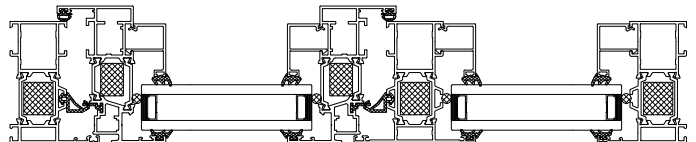

Secured by Design



Official Police Security Initiative



Senior Architectural Systems Ltd, Eland Road, Denaby Main, Doncaster, South Yorkshire, DN12 4HA.
Tel: 01709 772 600 E-mail: info@sasmail.co.uk www.seniorarchitectural.co.uk

Due to a policy of continual product development, Senior Architectural Systems reserves the right to alter any of the specifications given in this publication without prior notice. The specification for any given application must be checked with Senior Architectural Systems prior to manufacture. No responsibility for accuracy is accepted by Senior Architectural Systems. Always refer to the Technical Manual.

